




Hilti HAP 2.5 Elevator Hoist Anchor Point

Submission Folder

Product Information	2
Technical Information	3
Setting Instructions	15
Letters	
Country of Origin	16
Certification	17
Job Reference	
HAP 1.15	18
HAP 2.5	19

HAP 2.5 ELEVATOR HOIST ANCHOR POINT

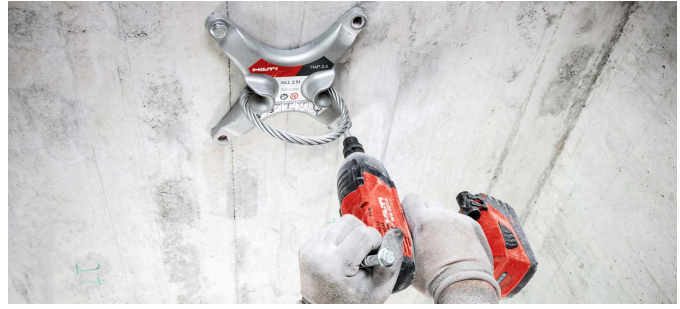

APPLICATIONS

- Temporary suspension of elevator cabins or equipment during installation or maintenance work in elevator shafts

ADVANTAGES

- Pre-assembled – delivered ready to install, optionally bundled with compatible anchors
- Built for one-person installation – weighing under 3 kg, this hoist point is much faster and easier to install overhead
- Compatible with PROFIS Engineering software – giving you a convenient method to design anchorage for the hoist anchor plate according to Eurocode 2 and ETAG
- Large, rigid hooking area – hook point designed for easy engagement and to prevent swivelling loads

Technical data

Anchor type	HST3 or HUS3
Material, corrosion	Cast-iron, Geomet coating
In-service temperature – range	-40 - 80 °C
Installation direction	Ceiling

Technical data

Dispenser, setting tool, accessory, tester type	Hoist anchor points
---	---------------------



Order Now








Ordering designation	Sales pack quantity	Item number
Elevator hoist anchor point HAP 2.5	2 pc	2247638

Please visit Hilti website for the latest item numbers and related products

HAP 2.5 Hoist Anchor Plate

Hoist Anchor Plate with 2.5 t WLL capacity for elevator shaft operations

Anchor version	Benefits
 <p>HAP 2.5 + HST3</p>	<ul style="list-style-type: none"> - 2.5 t WLL capacity according to Machinery Directive 2006/42/EC. - Anchorage of hoist to be designed with PROFIS Anchor software for cracked and uncracked concrete, \geq C20/25, according to EC2 and ETAG (No. 001 Annex C/2010). - Recommended and designed for anchorage with anchors: <ul style="list-style-type: none"> • HST3 M12x115 ($h_{nom}=80mm$) • HUS3 H10x110 ($h_{nom}=85mm$) - Delivered pre-assembled (one piece) with combo options available: HAP 2.5 + Anchors (4xHST3 or 4xHUS3). - Lightweight: One person installation possible at overhead position total weight < 3Kg. - No rotation of hook point allowed preventing swiveling.
 <p>HAP 2.5 + HUS3</p>	<ul style="list-style-type: none"> - Large hooking area for easy engagement. Hook point: $\varnothing > 90mm$. - Compact design for narrow spaces: rigid height < 56mm. - Printed IFU on the product for immediate clarification. - < 45° loading allowed in all directions.

Base material	Other information
 <p>Concrete (non-cracked)</p>  <p>Concrete (cracked)</p>	 <p>PROFIS Anchor design Software</p>

Applications

HAP 2.5 is designed to be used as post installed “master hoist point” for installation and/or maintenance in elevator shafts under static and quasi-static loading. In case of fatigue loading see TWU72/18. It can be used with manual or motor hoists and bears a working load up to 2.5 tons in variable directions.

Warning

	<p>Men riding (Car-top Lift-installation Method) (worker and material on top of the cabin) In case the main hoist point fails, the platform falls ~0.3m until the elevator safety-gears will automatically activate bringing the elevator cabin to a complete stop. Emergency brakes need to be activated.</p>
--	--

Basic loading data

Data for max 2.5 t WLL capacity applies to HAP 2.5 only when:

- Correct design of anchorage (see “design of anchorage”)
- Installation and anchor setting according to IFU from HAP 2.5t and corresponding anchor (HUS3 or HST3)
- No shock loading; vibratory dynamic safety factor γ_{dyn} up to 1.8

HAP Working Load Limitation (WLL)^{a) b)}

	<p style="text-align: center;">Load type</p> <p style="text-align: center;">Single Point</p>
$45^\circ < \alpha < 135^\circ$ WLL _{total} [metric ton]	2,5

a) In accordance with machinery safety directive 2006/42/EC the following working coefficients were implemented:

- Working coefficient of all metal components: $\gamma = 4$
- Working coefficient of the cables: $\gamma = 5$

b) Data valid (including hoist and anchors) for static loading and fatigue cycling loading and a number of cycles $N_{cyclesK} < 1000$ under pure tension or up to a load inclination of 45° , see test report TWU72/18.


Data valid (hoist only) for static loading and fatigue cycling loading and a number of cycles $1000 < N_{cyclesK} < 10000$ under pure tension or up to a load inclination of 45° . Anchors must be verified separately. For further details please contact you Hilti account manager and see test report TWU72/18.

Materials

Material quality

Part	Material / Mechanical properties or standard
Carrier plate	Rm 700-900 Mpa – 5 μ m Geomet 321A
Wire rope $\phi 11 \times 150 - 6 \times 36$ WS IWRC	Rope: steel 1960 MPa, zinc plated / ferrule: Alu
Holder	Low carbon steel – 5 μ m Geomet 321A
Blind rivet DIN EN ISO 15977 – 6.4x18	Stainless steel

Dimensions

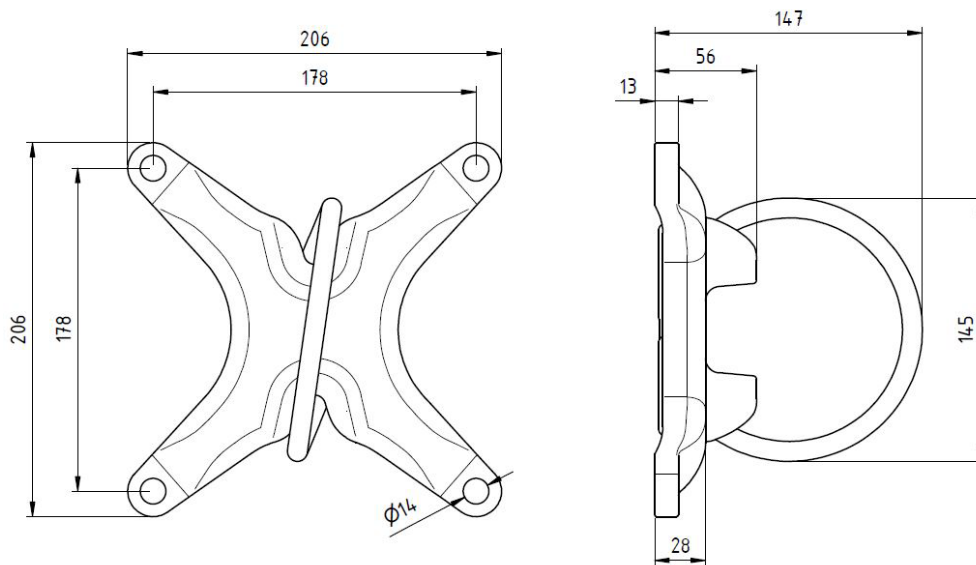

Onsite qualification

HAP 2.5 is designed for temporary & permanent application under dry indoor conditions.

Recommended tools to do onsite qualification: Anchor Tester HAT 28-E (#386372) with HAT Kit HAP 2.5 (#2301103).

Installation instructions

- 1) Install the anchors according to the Hilti Instruction for use. Only HST3 M12 with $h_{nom} \geq 80\text{mm}$ and HUS3 H10 with $h_{nom} \geq 85\text{mm}$ are qualified. Make sure HAP 2.5 is correctly installed, according to the Instruction for use of the HAP 2.5. Set up the HAT 28E according to the manual provided with the anchors tester. Set bridge legs to right heights. (*Image 1*). Then, connect the ring bolt adapter to steel wire rope. Always use the provide steel disc as shown in *Image 2*. Not using it could result in unallowed bending of the wire. Thus damaging the HAP 2.5. A HAP 2.5 with a bent wire is not safe for use.



Image 1





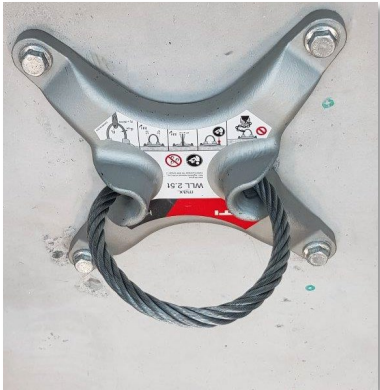



Image 2

- 2) Connect HAT 28-E with ring bolt adapter and make sure the bridge of the tester is parallel to the concrete surface as well as to the HAP 2.5 base (*Image 3*). Check if the baseplate can be moved versus the concrete. It needs to be firm. Turn crank in clockwise direction until legs in contact with base material bring the system to a still situation (without starting the loading process). Check and make sure pullout force acts parallel to axis of anchors and to the legs of tester. HAP 2.5 must remain centered in the both parallel and perpendicular direction of the tester.



Image 3

<p>3) Set the red handle of the analogue gauge to zero in order to be able to start the measurement. <i>(Image 4).</i></p>	 <div data-bbox="1209 291 1364 347" style="border: 1px solid black; padding: 2px; display: inline-block;">Image 4</div>
<p>4) Hold the HAT 28-E by the grip while increasing the load of the HAP 2.5 by turning the crank (or with spanner wrench on hexagon nut on top of tester) in a clockwise direction. Increase the load until desired proof load is attained. <i>Image 5.</i> Do not exceed the maximum allowable load of the tester of 30kN!</p>	 <div data-bbox="1137 689 1292 745" style="border: 1px solid black; padding: 2px; display: inline-block;">Image 5</div>
<p>5) Keep the proof load on HAP 2.5 for the desired time. Do not keep retightening if the loading relaxes during this time. The displacement is not allowed to increase in this time.</p>	
<p>6) <i>(Image 6)</i> Release the load by turning the crank counterclockwise</p>	 <div data-bbox="906 1496 1061 1552" style="border: 1px solid black; padding: 2px; display: inline-block;">Image 6</div>
<p>7) Remove HAT 28-E and ring bolt adapter.</p>	
<p>8) Perform visual check on HAP 2.5 and base material <i>(Image 7).</i> Check if the baseplate is still firmly pressed to the concrete. If baseplate is loose, re-tight anchors and repeat procedure from the beginning.</p> <p>We recommend NOT TO USE the tested HAP 2.5 when:</p> <ul style="list-style-type: none"> • The baseplate is loose also after repeated test. • If the base material shows cracks during and or after the test around the HAP 2.5. It could be the sign of an overload of the concrete. • If the HAP is damaged or deformed or the cable is bent. 	 <div data-bbox="1082 2123 1236 2179" style="border: 1px solid black; padding: 2px; display: inline-block;">Image 7</div>

<p>In these cases set a new point in a different position and repeat procedure from the beginning.</p>	
<p>9) If the testing was successful mark or label the HAP 2.5 according to your requirements.</p>	

Design of anchorage

An exemplary calculation under static considerations of a Hoist with different Hilti anchoring products designed with Hilti Profis engineering can be found below while the Input data applies. In case of different design conditions a new calculation should be performed.

HAP 2.5 is designed to be used as hoist point for lifting loads under variable directions in elevator installation or maintenance. The design of an anchorage for the HAP 2.5 must be ensured for varying load conditions (varying directions, dynamic effects, etc.). For this the anchorage for HAP 2.5 has to be designed according to extreme load cases: a concrete anchor can only be considered as suitable for use with the HAP 2.5 hoist point if the approved anchor satisfies the following load scenarios (e.g. by PROFIS calculation) with EC2-4 calculation method. It has to be done in accordance with the relevant codes/ETAs for each application case separately.

HAP 2.5 t + HST3 M12 – Pure tension

$N = \text{Action} = 2,5\text{t (WLL)} \times 1,8 (\gamma_{\text{dyn}}) = 45 \text{ kN}$


1 Input data



Anchor type and size:	HST3 M12 hef2
Item number:	2105719 HST3 M12x115 40/20
Effective embedment depth:	$h_{ef} = 70.0 \text{ mm}$, $h_{nom} = 80.0 \text{ mm}$
Material:	
Approval No.:	ETA-98/0001
Issued I Valid:	09/02/2018 -
Proof:	Design Method ETAG (No. 001 Annex C/2010)
Stand-off installation:	$e_b = 0.0 \text{ mm}$ (no stand-off); $t = 11.0 \text{ mm}$
Baseplate ^R :	$l_x \times l_y \times t = 220.0 \text{ mm} \times 220.0 \text{ mm} \times 11.0 \text{ mm}$; (Recommended plate thickness: not calculated)
Profile:	Cylinder, 10; (L x W x T) = 10.0 mm x 10.0 mm
Base material:	cracked concrete, C20/25, $f_{c,cube} = 25.00 \text{ N/mm}^2$; $h = 150.0 \text{ mm}$
Installation:	hammer drilled hole, Installation condition: Dry
Reinforcement:	No reinforcement or Reinforcement spacing $\geq 150 \text{ mm}$ (any \emptyset) or $\geq 100 \text{ mm}$ ($\emptyset \leq 10 \text{ mm}$) no longitudinal edge reinforcement Reinforcement to control splitting according to ETAG 001, Annex C, 5.2.2.6 present.

^R - The anchor calculation is based on a rigid baseplate assumption.

Geometry [mm] & Loading [kN, kNm]

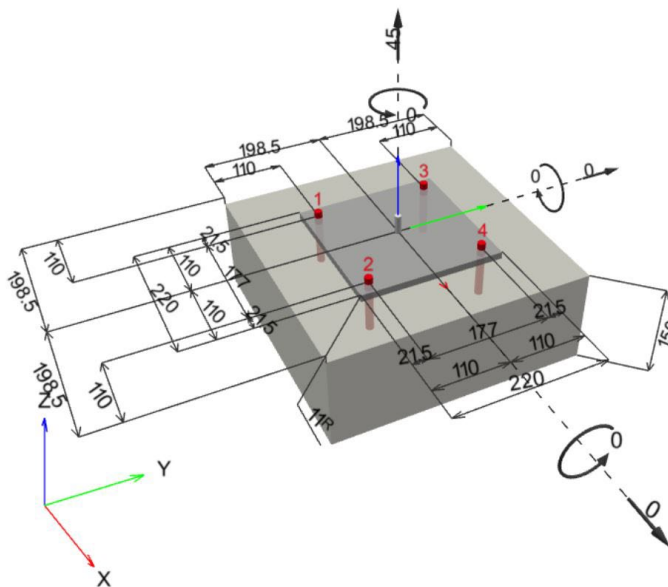

1.1 Load combination

Case	Description	Forces [kN] / Moments [kNm]	Seismic	Fire	Max. Util. Anchor [%]
1	Combination 1	N = 45.000; V _x = 0.000; V _y = 0.000; M _x = 0.000; M _y = 0.000; M _z = 0.000;	no	no	95

2 Load case/Resulting anchor forces


Load case: Design loads

Anchor reactions [kN]

Tension force: (+Tension, -Compression)

Anchor	Tension force	Shear force	Shear force x	Shear force y
1	11.250	0.000	0.000	0.000
2	11.250	0.000	0.000	0.000
3	11.250	0.000	0.000	0.000
4	11.250	0.000	0.000	0.000

max. concrete compressive strain: - [%]
 max. concrete compressive stress: - [N/mm²]
 resulting tension force in (x/y)=(0.0/0.0): 45.000 [kN]
 resulting compression force in (x/y)=(0.0/0.0): 0.000 [kN]

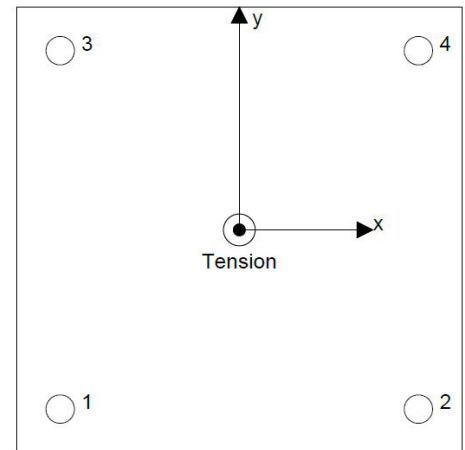

Anchor forces are calculated based on the assumption of a rigid baseplate.

HAP 2.5 t + HST3 M12 – 45° angle

$$N = N_t \times \sin 45^\circ = 32 \text{ kN}$$

$$V_x = N_t \times \cos 45^\circ = 32 \text{ kN}$$


1 Input data

Anchor type and size:	HST3 M12 hef2
Item number:	2105719 HST3 M12x115 40/20
Effective embedment depth:	$h_{ef} = 70.0 \text{ mm}$, $h_{nom} = 80.0 \text{ mm}$
Material:	
Approval No.:	ETA-98/0001
Issued I Valid:	09/02/2018 -
Proof:	Design Method ETAG (No. 001 Annex C/2010)
Stand-off installation:	$e_b = 0.0 \text{ mm}$ (no stand-off); $t = 11.0 \text{ mm}$
Baseplate ^R :	$l_x \times l_y \times t = 220.0 \text{ mm} \times 220.0 \text{ mm} \times 11.0 \text{ mm}$; (Recommended plate thickness: not calculated)
Profile:	Cylinder, 10; (L x W x T) = 10.0 mm x 10.0 mm
Base material:	cracked concrete, C20/25, $f_{c,cube} = 25.00 \text{ N/mm}^2$; $h = 150.0 \text{ mm}$
Installation:	hammer drilled hole, Installation condition: Dry
Reinforcement:	No reinforcement or Reinforcement spacing $\geq 150 \text{ mm}$ (any \emptyset) or $\geq 100 \text{ mm}$ ($\emptyset \leq 10 \text{ mm}$) no longitudinal edge reinforcement Reinforcement to control splitting according to ETAG 001, Annex C, 5.2.2.6 present.



^R - The anchor calculation is based on a rigid baseplate assumption.

Geometry [mm] & Loading [kN, kNm]

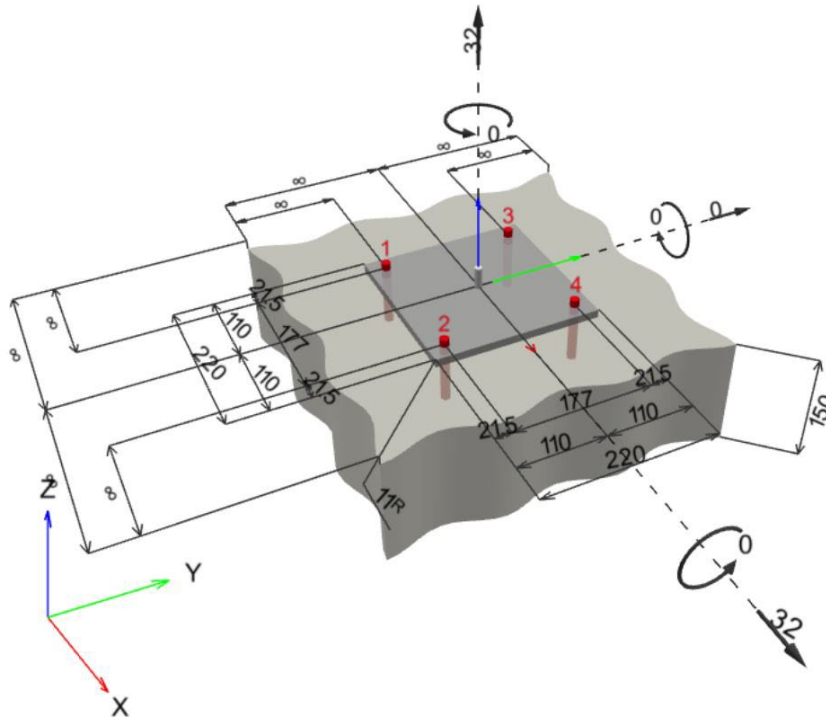

1.1 Load combination

Case	Description	Forces [kN] / Moments [kNm]	Seismic	Fire	Max. Util. Anchor [%]
1	Combination 1	N = 32.000; V _x = 32.000; V _y = 0.000; M _x = 0.000; M _y = 0.000; M _z = 0.000;	no	no	70

2 Load case/Resulting anchor forces


Load case: Design loads

Anchor reactions [kN]

Tension force: (+Tension, -Compression)

Anchor	Tension force	Shear force	Shear force x	Shear force y
1	8.000	8.000	8.000	0.000
2	8.000	8.000	8.000	0.000
3	8.000	8.000	8.000	0.000
4	8.000	8.000	8.000	0.000

max. concrete compressive strain: - [%]
 max. concrete compressive stress: - [N/mm²]
 resulting tension force in (x/y)=(0.0/0.0): 32.000 [kN]
 resulting compression force in (x/y)=(0.0/0.0): 0.000 [kN]

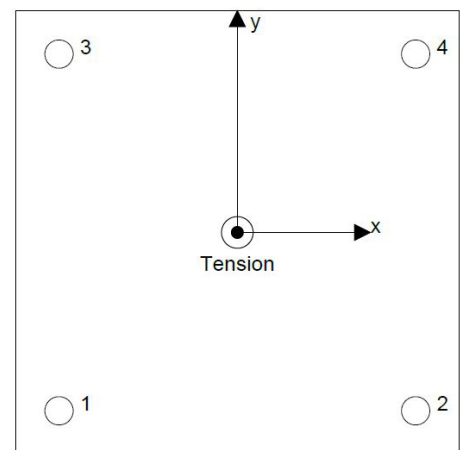

Anchor forces are calculated based on the assumption of a rigid baseplate.

HAP 2.5 t + HUS3 H10 – Pure tension

N= Action = 2,5t (WLL) x 1,8 (γ_{dyn}) = 45 kN


1 Input data

Anchor type and size:	HUS3-H 10 h _{nom} 3
Item number:	2079915 HUS3-H 10x100 45/25/15
Effective embedment depth:	$h_{ef} = 67.1$ mm, $h_{nom} = 85.0$ mm
Material:	1.5525
Approval No.:	ETA-13/1038
Issued I Valid:	27/04/2018 -
Proof:	Design Method ETAG (No. 001 Annex C/2010)
Stand-off installation:	$e_b = 0.0$ mm (no stand-off); $t = 11.0$ mm
Baseplate ^R :	$l_x \times l_y \times t = 220.0$ mm x 220.0 mm x 11.0 mm; (Recommended plate thickness: not calculated)
Profile:	Cylinder, 10; (L x W x T) = 10.0 mm x 10.0 mm
Base material:	cracked concrete, C20/25, $f_{c,cube} = 25.00$ N/mm ² ; $h = 150.0$ mm
Installation:	hammer drilled hole, Installation condition: Dry
Reinforcement:	No reinforcement or Reinforcement spacing ≥ 150 mm (any \varnothing) or ≥ 100 mm ($\varnothing \leq 10$ mm) no longitudinal edge reinforcement Reinforcement to control splitting according to ETAG 001, Annex C, 5.2.2.6 present.



^R - The anchor calculation is based on a rigid baseplate assumption.

Geometry [mm] & Loading [kN, kNm]

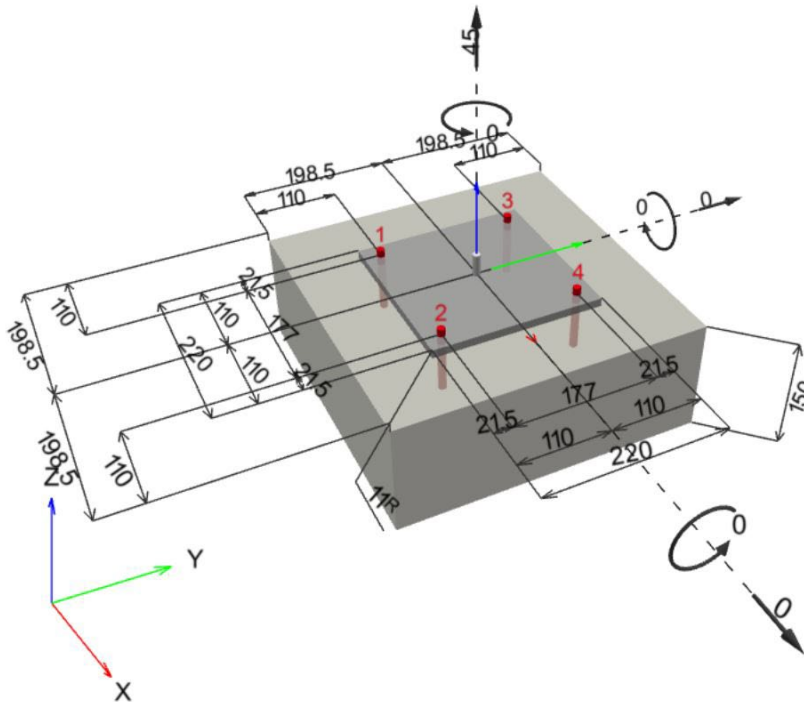

1.1 Load combination

Case	Description	Forces [kN] / Moments [kNm]	Seismic	Fire	Max. Util. Anchor [%]
1	Combination 1	N = 45.000; V _x = 0.000; V _y = 0.000; M _x = 0.000; M _y = 0.000; M _z = 0.000;	no	no	97

2 Load case/Resulting anchor forces


Load case: Design loads

Anchor reactions [kN]

Tension force: (+Tension, -Compression)

Anchor	Tension force	Shear force	Shear force x	Shear force y
1	11.250	0.000	0.000	0.000
2	11.250	0.000	0.000	0.000
3	11.250	0.000	0.000	0.000
4	11.250	0.000	0.000	0.000

max. concrete compressive strain: - [%]
 max. concrete compressive stress: - [N/mm²]
 resulting tension force in (x/y)=(0.0/0.0): 45.000 [kN]
 resulting compression force in (x/y)=(0.0/0.0): 0.000 [kN]

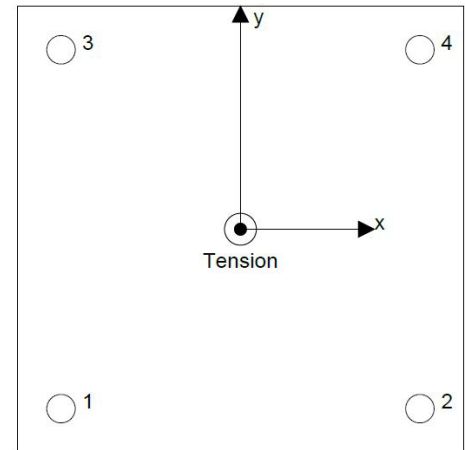

Anchor forces are calculated based on the assumption of a rigid baseplate.

HAP 2.5 t + HUS3 H10 – 45° angle

$$N = N_t \times \sin 45^\circ = 32 \text{ kN}$$

$$V_x = N_t \times \cos 45^\circ = 32 \text{ kN}$$


1 Input data

Anchor type and size:	HUS3-H 10 h _{nom} 2
Item number:	2079914 HUS3-H 10x90 35/15/5
Effective embedment depth:	h _{ef} = 58.6 mm, h _{nom} = 75.0 mm
Material:	1.5525
Approval No.:	ETA-13/1038
Issued / Valid:	27/04/2018 -
Proof:	Design Method ETAG (No. 001 Annex C/2010)
Stand-off installation:	e _b = 0.0 mm (no stand-off); t = 11.0 mm
Baseplate ^R :	l _x x l _y x t = 220.0 mm x 220.0 mm x 11.0 mm; (Recommended plate thickness: not calculated)
Profile:	Cylinder, 10; (L x W x T) = 10.0 mm x 10.0 mm
Base material:	cracked concrete, C20/25, f _{c,cube} = 25.00 N/mm ² ; h = 150.0 mm
Installation:	hammer drilled hole, Installation condition: Dry
Reinforcement:	No reinforcement or Reinforcement spacing >= 150 mm (any Ø) or >= 100 mm (Ø <= 10 mm) no longitudinal edge reinforcement Reinforcement to control splitting according to ETAG 001, Annex C, 5.2.2.6 present.



^R - The anchor calculation is based on a rigid baseplate assumption.

Geometry [mm] & Loading [kN, kNm]

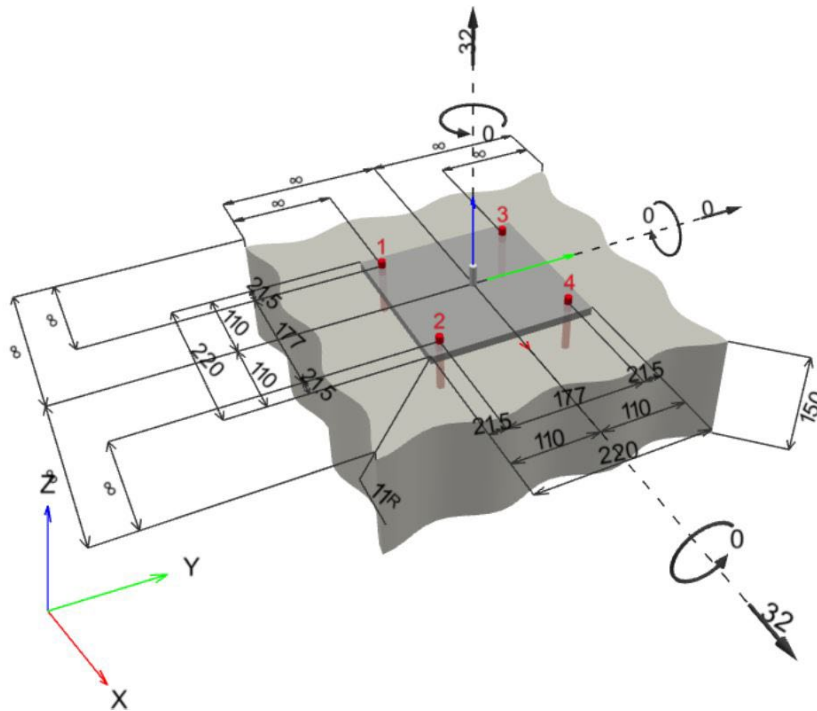

1.1 Load combination

Case	Description	Forces [kN] / Moments [kNm]	Seismic	Fire	Max. Util. Anchor [%]
1	Combination 1	N = 32.000; V _x = 32.000; V _y = 0.000; M _x = 0.000; M _y = 0.000; M _z = 0.000;	no	no	100

2 Load case/Resulting anchor forces


Load case: Design loads

Anchor reactions [kN]

Tension force: (+Tension, -Compression)

Anchor	Tension force	Shear force	Shear force x	Shear force y
1	8.000	8.000	8.000	0.000
2	8.000	8.000	8.000	0.000
3	8.000	8.000	8.000	0.000
4	8.000	8.000	8.000	0.000

max. concrete compressive strain: - [%]
 max. concrete compressive stress: - [N/mm²]
 resulting tension force in (x/y)=(0.0/0.0): 32.000 [kN]
 resulting compression force in (x/y)=(0.0/0.0): 0.000 [kN]

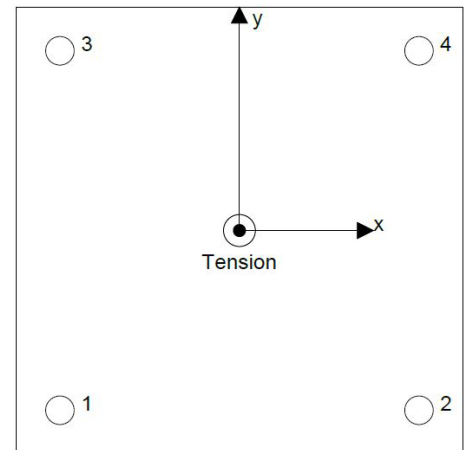


Anchor forces are calculated based on the assumption of a rigid baseplate.

Setting information

Setting parameters

Parameter			HAP 2.5
Minimum base material thickness	h_{\min}	[mm]	According to technical data of applied anchors
Spacing (Hoist Anchor Plate)	s	[mm]	178
Edge distance	c	[mm]	According to technical data of applied anchors ^{a)}

a) For smaller edge distances the design loads have to be reduced (see ETAG 001, Annex C).













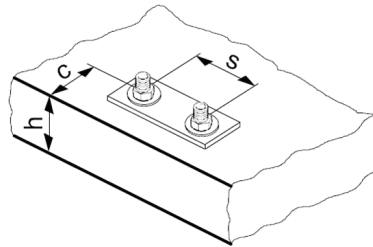



Inspection criteria

Caution: The attachment point must be in a good operating condition and undamaged. Broken wires, signs of corrosion, visible distortions or deformations are unacceptable.

Caution: The shaft ceiling, particularly the concrete, must be in sound condition. Any visible cracking, blow out or signs of corrosion are unacceptable.

Caution: Do not use an attachment point which has an unreadable or missing identification label.

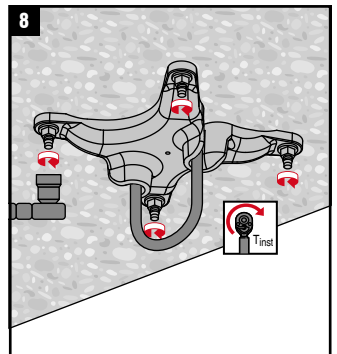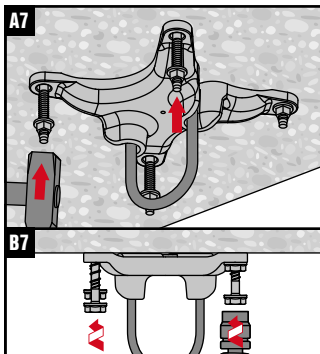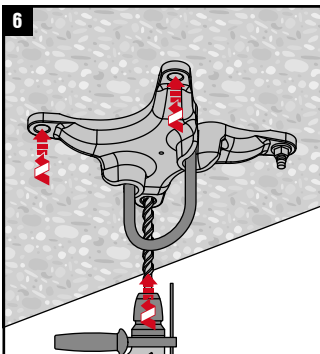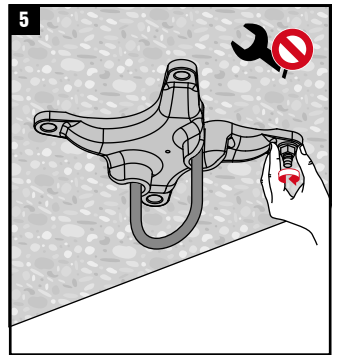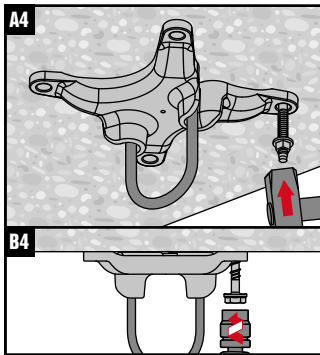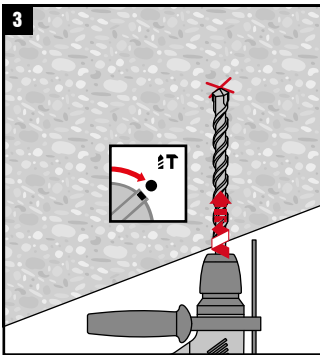



liftinstituut
SINCE 1933

TYPE-EXAMINATION CERTIFICATE

Issued by Liftinstituut B.V.

Certificate no. : NL22-400-1002-429-01 Revision no.: -

Description of the product : Hoist anchor plate

Trademark : Hilti

Type no. : HAP 2.5

Name and address of the manufacturer : Hilti
Feldkircherstrasse 100
9494 Schaan
Liechtenstein

Name and address of the certificate holder : Hilti
Feldkircherstrasse 100
9494 Schaan
Liechtenstein

Certificate issued on the following requirements :

Certificate based on the following standard : Parts of: EN 1677-1:2001+A1:2008

Test laboratory : None

Date and number of the laboratory report : None

Date of type examination : September 2020-July 2022

Additional document with this certificate : Report belonging to the type examination certificate no.: NL22-400-1002-429-01


Additional remarks : None

Conclusion : This product meets the requirements of the relevant paragraphs of EN 1677-1:2001+A1:2008 taking into account any additional remarks mentioned above.

Amsterdam

Date : 18-07-2022
Valid until : 18-07-2027


ing A.J. van Ommen
International Business
Manager


Certification decision by

Attn. : To whom it may concern

Date : 26 September 2023

Ref. : 081/FP/DY/23

Subject : Country of Origin- Hilti HAP 2.5 Elevator Hoist Anchor Point

Dear Sir / Madam,

Enclosed please find the information of Hilti HAP 2.5 Elevator Hoist Anchor Point

Brand Name : Hilti

Model Name : Hilti HAP 2.5 Elevator Hoist Anchor Point

Manufacturer : Hilti Corporation

Address of Manufacturer : FL-9494, Principality of Liechtenstein.

Manufacturer Contact Person : Dennis Yeung

Supplier : Hilti (Hong Kong) Ltd

Address of Supplier : 701-704, 7/F, Tower A, Manulife Financial Centre,
223 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Supplier Contact Person : Dennis Yeung (+852 9723 4621)

Country of Origin : China

Should you have further questions, please do not hesitate to contact our Technical Representatives, Customer Service Hotline at 8228-8118, or email us at hksales@hilti.com.

Yours faithfully,



Dennis Yeung
Head of Product Leadership Strategy, F&P

