



# Hilti X-P B3 P7 Concrete Nails

## Submission Folder

### Product Information

X-P B3 P7 Concrete Nails	2
Battery-actuated fastening tool BX 3-L ME 02	3
Accessories for BX 3-L ME 02	4

Technical Information	8
-----------------------	---

Installation Method	18
---------------------	----

### Letters

Country of Origin	19
-------------------	----

Job Reference	21
---------------	----



Recycling one ton of paper saves 17 trees and 7000 gallons of water.  
Please consider your environmental responsibility before using the hard copy version!

## X-P B3 P7 Concrete Nails



**Order Now**



Ordering designation	Fastener shank length	Fastener shank diameter	Sales pack quantity	Item number
X-P 30 B3 P7	30 mm	3 mm	200 pc	2105406
X-P 36 B3 P7	36 mm	3 mm	200 pc	2105407

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.  
Please visit Hilti website for the latest item numbers and related products

## Battery-actuated fastening tool BX 3-L 02



### APPLICATIONS

- Fastening drywall track to floors, walls and ceilings on concrete, solid masonry or steel
- Fastening mesh, membranes or foil with special washer holders to concrete walls
- Fastening wall tie connections to concrete, solid masonry or steel – use of the special washer holder is recommended
- Suitable for various light-duty fastening applications on concrete, solid masonry or steel
- Fastening cables, conduits or various light electrical installations – use of the ME nailer nose is recommended
- Fastening wood up to 25 mm thick to concrete

### ADVANTAGES

- Combustion-free operation – no gas cans or powder cartridges to store and dispose of
- Drives up to 800/500/400 fasteners with a single battery charge (depending on B22 battery model - 5.2 Ah, 3.0 Ah or 2.6 Ah)
- Engineered for high productivity – fastening rate of 1.3 nails per second
- Slim design for easier access in corners, close to walls or in tight spaces
- Cordless tool platform – the same battery for all 22V Hilti tools

### Technical data

<b>Power (max.)</b>	85 J
<b>Weight</b>	3.48 kg
<b>Automatic piston return</b>	Yes
<b>Emission noise-pressure level at the work station: LpA, 1s<sup>1)</sup></b>	90 dB (A)
<b>Dimensions (LxWxH)</b>	474 x 134 x 368 mm
<b>Max. fastener driving rate</b>	650
<b>Weight according to EPTA Procedure 01/2003</b>	4 kg
<b>Fastener intake</b>	30 nails
<b>Fastener length range</b>	14 - 36 mm

<sup>1)</sup> Declared measured values of noise characteristics according to 2006/42/EC Machinery Directive in conjunction with E DIN EN 15895



Fleet Management

Order Now







Watch Video



Ordering designation	Package contents	Sales pack quantity	Item number
<b>BX 3-L 02 with X-FG ME</b>	1x Battery-actuated tool BX 3-L 02, 1x Fastener guide X-FG B3-ME packed, 1x case	1 pc	<b>3611127</b>

Please visit Hilti website for the latest item numbers and related products

### Battery and charger info

Ordering designation		Sales pack quantity	Item number
<b>Battery charger C 4-22 110V</b>		1 pc	<b>2372874</b>
<b>Battery charger C 4-22 230V</b>		1 pc	<b>2372873</b>
<b>B 22-55 Nuron battery</b>		1 pc	<b>2251347</b>
<b>B 22-85 Nuron battery</b>		1 pc	<b>2251351</b>

Please visit Hilti website for the latest item numbers and related products

# Fasteners for Electrical and Mechanical Applications

## Cable tie holders X-ECT MX



Ordering designation	Max wide	Sales pack quantity	Item number
X-ECT MX	9 mm	100 pc	285709 <sup>1)</sup>
X-ECT UV MX	9 mm	100 pc	285710 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

## Cable clasps X-EKB MX



Ordering designation	Cable capacity (8mm cable)	Sales pack quantity	Item number
X-EKB 4 MX	4	100 pc	285712 <sup>1)</sup>
X-EKB 8 MX	8	100 pc	285713 <sup>1)</sup>
X-EKB 16 MX	16	25 pc	285714 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

## Bunched-Cable holders X-ECH MX



Ordering designation	Cable capacity (8mm cable)	Sales pack quantity	Item number
X-ECH 15/B MX kit	15	100 pc	2018729 <sup>1)</sup>
X-ECH 30/B MX kit	30	50 pc	2018891 <sup>1)</sup>
Base X-ECH-B MX	-	50 pc	2018391 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

## Cable trunking fastener X-ET MX



Ordering designation	Sales pack quantity	Item number
X-ET MX	250 pc	285718

Please visit Hilti website for the latest item numbers and related products

## Conduit clamps X-EKS MX



**Order Now**



Order designation	Cable conduit diameter	Sales pack quantity	Item number
X-EKS 16 MX	16 mm	100 pc	285719 <sup>1)</sup>
X-EKS 20 MX	20 mm	100 pc	285720
X-EKS 25 MX	25 mm	100 pc	285721
X-EKS 32 MX	32 mm	100 pc	285722 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

## Snap-lock conduit clamps X-EKSC MX



**Order Now**



Order designation	Cable conduit diameter	Sales pack quantity	Item number
X-EKSC 20 MX	20 mm	100 pc	274086 <sup>1)</sup>
X-EKSC 25 MX	20 mm	100 pc	274087 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

## Metal conduit clamps X-EMTSC MX



**Order Now**



Order designation	Sales pack quantity	Item number
X-EMTSC 1/2" MX	100 pc	228338 <sup>1)</sup>
X-EMTSC 3/4" MX	100 pc	228339 <sup>1)</sup>
X-EMTSC 1" MX	100 pc	228340 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

## Metal conduit clip X-FB MX



**Order Now**



Order designation	Cable conduit diameter	Sales pack quantity	Item number
X-FB 16 MX	16 mm	200 pc	286799 <sup>1)</sup>
X-FB 20 MX	20 mm	200 pc	286800
X-FB 25 MX	25 mm	200 pc	286802
X-FB 32 MX	32 mm	100 pc	286804 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

### Butterfly metal conduit clip X-DFB MX



**Order Now**



Order designation	Cable conduit diameter	Sales pack quantity	Item number
X-DFB 20 MX	20 mm	100 pc	273384 <sup>1)</sup>
X-DFB 25 MX	20 mm	100 pc	273386 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

### Threaded rod hanger X-EHS M MX



**Order Now**



Order designation	Sales pack quantity	Item number
X-EHS M8 MX	100 pc	273368 <sup>1)</sup>

<sup>1)</sup> For detailed stock availability and lead time information please contact your Hilti representative.

Please visit Hilti website for the latest item numbers and related products

### Ceiling clip X-ECC MX



**Order Now**






Order designation	Sales pack quantity	Item number
X-ECC MX	100 pc	228342

Please visit Hilti website for the latest item numbers and related products

7

### Accessories for BX 3

Ordering designation	Sales pack quantity	Item number
Washer holder X-WH B3 packed 	1 pc	2101256
Fastener guide X-FG B3-ME packed 	1 pc	2101258
Fastener guide X-FG B3-IF packed 	1 pc	2116415

Please visit Hilti website for the latest item numbers and related products

# BX 3 System Fastener for interior finishing, building construction, mechanical and electrical application

## Product data

### BX 3 battery-actuated direct fastening tools



BX 3-ME (02)  
BX 3-IF



BX 3 02  
BX 3-L 02


### Features and benefits

- Hilti's combustion-free direct fastening technology for driving nails into concrete, steel and some types of solid masonry
- High user comfort thanks to low levels of compression force, noise and recoil
- No disposal of (used) propellant cartridges or gas cans
- Hilti's 22V cordless tool battery platform


## Fasteners and their compatibility

### Nails


For fastening to concrete  
X-P 17/20/24 B3 MX  
X-P 30/36 B3 P7  
X-C 20/24/27/30 B3 MX



X-C 36 B3 MX




For fastening to steel  
X-S 14 B3 MX




### Threaded studs


For fastening to concrete  
X-M6-7-24 B3 P7




X-W6-12-20 B3 P7



For fastening to steel  
X-M6-7-14 B3 P7



X-W6-12-14 B3 P7



	BX 3-ME (02)	BX 3-IF	BX 3 02	BX 3-L 02
X-S 14 B3 MX	yes	yes	yes	yes
X-P 17 B3 MX	yes	yes	yes	yes
X-P 20 B3 MX	yes	yes	yes	yes
X-P 24 B3 MX	yes	yes	yes	yes
X-C 20 B3 MX	yes	yes	yes	yes
X-C 24 B3 MX	yes	yes	yes	yes
X-C 27 B3 MX	no	no	yes	yes
X-C 30 B3 MX	no	no	yes	yes
X-C 36 B3 MX	no	no	no	yes
X-M/W _ _ _ B3 P7	yes	yes	no	no
X-P _ B3 P7	yes	yes	no	no
ME MX elements	yes	with ME FG	with ME FG	with ME FG


### Material specifications

X-P B3 MX/P7, X-S B3 MX  
X-C B3 MX

Carbon steel, HRC 57.5, 2-13 µm zinc coating  
Carbon steel, HRC 56.5, 2-13 µm zinc coating



## Electrical elements to be used with nails – examples

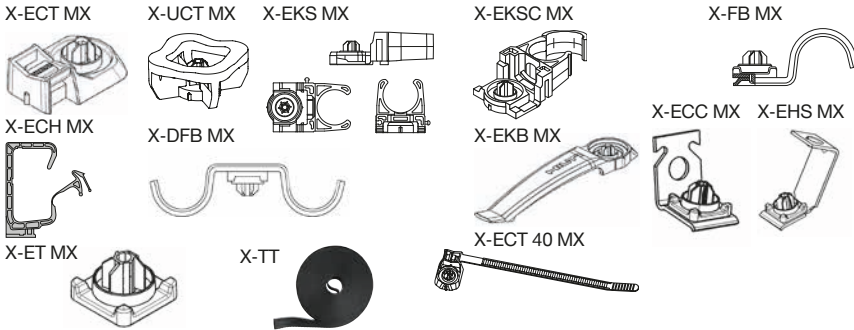

## Material specifications

X-ECT MX, X-EKS, X-EKSC MX, ECH MX	PA, halogen free, silicone free, light grey RAL 7035
X-EKB MX	PA, halogen free, light grey RAL 7035
X-ECT-FR MX	PBT, silicone free, flame retardant, stone grey RAL 7030
X-EKB-FR MX	PBT, silicone free, flame retardant, stone grey RAL 7030
X-UCT MX, X-ET MX	HDPE, halogen free, silicone free, light grey RAL 7035
X-TT	PET
X-FB MX, X-DFB MX	Galvanized steel sheet, $f_u = 270-420 \text{ N/mm}^2$ , 10–20 $\mu\text{m}$ zinc coating
X-ECC MX, X-EHS MX	Galvanized steel sheet, $f_u = 270-420 \text{ N/mm}^2$ , 10–20 $\mu\text{m}$ zinc coating

## Approvals

ICC-ESR 1752 (USA)  
ETA-16/0301

X-P 20 B3 MX, X-P 24 B3 MX, various electrical elements (see ETA approval Annex A1)

## Applications

### With nails



Drywall tracks to concrete and steel



Fastening wood, e.g. Placopan®, to concrete



Junction boxes, switch boxes, etc

### With nails and elements



Flexible or rigid cable conduits with cable ties




Fastening cables



Cable conduits or light-duty pipes

### Performance data

Performance data for drywall track fastening



X-S 14 B3 MX (Base material: steel)

Tension $N_{rec}$ [kN]	Shear $V_{rec}$ [kN]
0.4	0.4

X-P B3, X-C B3 (Base material: concrete / sand-lime masonry)

Embedment [mm]	Recommended Loads [kN]					
	Tension $N_{rec}$		Shear $V_{rec}$		Tension $N_{rec}$	Shear $V_{rec}$
	Concrete Type				Sand-lime masonry	
	Soft	Tough	Soft	Tough		
≥ 22	-	-	-	-	0.3	0.3
≥ 18	0.2	-	0.2	-	0.2	0.2
≥ 14	0.1	0.1	0.1	0.1	0.1	0.1

#### Conditions:

- For safety relevant fastenings sufficient redundancy of the entire system is required; Minimum of 5 nails per fastened track. All visible setting failures must be replaced
- Sheet metal failure is not considered in recommended loads and must be assessed separately
- Soft concrete up to  $f_{c,cube} = 45 \text{ N/mm}^2$  (C35/45), some tough concrete up to  $f_{c,cube} = 60 \text{ N/mm}^2$  (C50/60).
- Concrete with aggregate like granite or river rock or softer, and up to 16 mm diameter



	Stick rate estimation	
	Soft Concrete	Tough concrete
X-P B3	85% - 98%	70% - 85%
X-C B3	75% - 90%	55% - 70%

- The stick rate indicates the percentage of nails that were driven correctly to carry a load. Stick rate can vary from the above values depending on job site conditions.

## Performance data

### Recommended loads for threaded studs

Designation	Tension load $N_{rec}$	Shear load $V_{rec}$	Tightening torque $T_{rec}$	Base material
X-M6-7-24 B3 P7	0.05 kN	0.05 kN	3.0 Nm	Concrete, sand-lime masonry
X-W6-12-20 B3 P7				
X-M6-7-14 B3 P7	0.20 kN	0.20 kN	3.0 Nm	Steel
X-W6-12-14 B3 P7				

### Recommended tension and shear load for fastening electrical elements

Designation	Tension load $N_{rec}$	Shear load $V_{rec}$
X-ECT 40 MX, X-ECT MX, X-ECT FR MX	0.040 kN	0.040 kN
X-UCT MX	0.040 kN	0.040 kN
X-EKS MX	0.011 kN	0.011 kN
X-EKSC MX	0.032 kN	0.032 kN
X-FB MX / X-DFB MX	0.020 kN	0.020 kN
X-ECC MX	0.050 kN	0.050 kN
X-EHS MX	0.080 kN	0.080 kN
X-EKB 4 MX, X-EKB FR 4 MX	0.090 kN	
X-EKB 8 MX, X-EKB FR 8 MX	0.014 kN	
X-EKB 16 MX, X-EKB FR 16 MX	0.018 kN	
X-ECH MX	0.040 kN	0.040 kN

### Recommended tension and shear load for fastening pipes

Designation	Tension load $N_{rec}$	Shear load $V_{rec}$
X-ECT 40 MX, X-ECT MX, X-ECT FR MX	0.040 kN	0.040 kN
X-EKSC MX	0.032 kN	0.032 kN



- copper pipes and plastic pipes, e.g. PEX pipes
- pipes filled with 90°C hot fluid
- tests according to Kiwa standard BRL-K506

### Recommended tension and shear load for fastening cable trunking

Designation	Tension load $N_{rec}$	Shear load $V_{rec}$
X-ET MX	0.10 kN	0.10 kN

#### Conditions:

- Spacing  $\leq 100$  mm
- All visible failures must be replaced

### Nail recommendation

For **concrete** base material

Nail types	Length [mm]	Tip	Shank $\varnothing$ [mm]	Material	Hardness [HRC]	Coating [ $\mu$ m]
X-P B3 P7/MX	17-36	Long conical	3.0	Carbon steel	57.5	Zinc, 2-10

- Premium nails (as listed above) are recommended for use on soft and some tough concrete. For more details regarding nail classification and concrete types, please refer to **Concrete Fastener Selection** section in Hilti Direct Fastening Technology Manual (DFTM)
- X-P 17/20/24 B3 MX to be used with BX 3 02, BX 3-L 02, BX 3-ME (02) and BX 3-IF
- X-P 30/36 B3 P7 to be used with BX 3-ME (02) and BX 3-IF

For **concrete** base material

Nail types	Length [mm]	Tip	Shank $\varnothing$ [mm]	Material	Hardness [HRC]	Coating [ $\mu$ m]
X-C B3 MX	20-30 36	Cut	3.0 2.75	Carbon steel	56.5	Zinc, 5-13

- Standard nails (as listed above) are recommended for use on soft concrete only. For more details regarding nail classification and concrete types, please refer to **Concrete Fastener Selection** section in Hilti Direct Fastening Technology Manual (DFTM)
- X-C 20/24/27/30 B3 MX to be used with BX 3 02
- X-C 20/24/27/30/36 B3 MX to be used with BX 3-L 02
- X-C 20/24 B3 MX to be used with BX 3-ME (02) and BX 3-IF


For **steel** base material

Nail types	Length [mm]	Tip	Shank $\varnothing$ [mm]	Material	Hardness [HRC]	Coating [ $\mu$ m]
X-S 14 B3 MX	14	Long conical	3.0	Carbon steel	57.5	Zinc, 2-10


- X-S 14 B3 MX to be used with BX 3 02, BX 3-L 02, BX 3-ME (02) and BX 3-IF
- Please refer to next pages for application limits on steel base material

## Application requirements

### Thickness of base material




Concrete (for nails and threaded studs)  
 $h_{\min} = 60 \text{ mm}$   
 $d_{\text{nom}} = 3.0 \text{ mm}$



Steel  
 $t_{II} \geq 4.0 \text{ mm}$  (for nails)  
 $t_{II} \geq 6.0 \text{ mm}$  (for threaded studs)


### Thickness of fastened material



Wooden track:  $t_{\perp} \leq 27 \text{ mm}$  (conditions: head of the nail is countersunk flat to the surface)  
 Metal track:  $t_{\perp} \leq 2 \text{ mm}$   
 Deflection head:  $t_{\text{tot.}} \leq 21 \text{ mm}$  (gypsum strip + metal track and sealant)


### Spacing and edge distances (mm)

#### Max. spacing along track





Fastener spacing max. 30 cm for proprietary light non-load-bearing partition walls with fire classification


#### All track ends (cut-outs for doors), secure with 2 nails



#### Distance to edge of concrete / sand-lime masonry

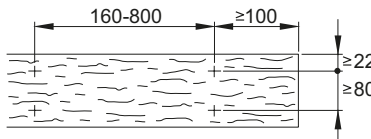


#### Spacing between nails when fastening wood to concrete




Based on common practice, spacing needs to be adjusted based on specific load requirement and achieved embedment depth.

#### Distance to edge of fastened material (steel base material)




### Application limits

X-S 14 B3 MX

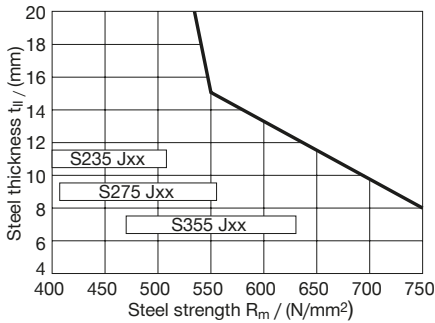

X-M6-7-14 B3 P7, X-W6-12-14 B3 P7

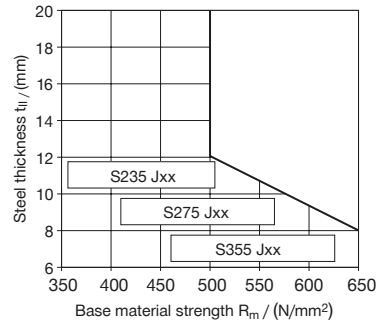

### Corrosion information

The intended use only comprises fastenings which are not directly exposed to external weather conditions or moist atmospheres, i.e. only intended for dry indoor areas.

### Fastener selection and system recommendation

Fastener program









#### Nails

Nail	Item no.	Shank length (mm)	Shank diameter (mm)	Base material	Length recommendation
X-S 14 B3 MX	2156392, 2156393	14	3	Steel	
X-P 17 B3 MX	2156216, 2156219	17	3	Concrete / Sand-lime masonry	
X-P 20 B3 MX	2156217, 2156390	20	3		
X-P 24 B3 MX	2156218, 2156391	24	3		
X-P 30 B3 P7	2105406	30	3		
X-P 36 B3 P7	2105407	36	3		
X-C 20 B3 MX	2123993	20	3		
X-C 24 B3 MX	2123994	24	3		
X-C 27 B3 MX	2224568	27	3		
X-C 30 B3 MX	2149988	30	3		
X-C 36 B3 MX	2149989	36	2.75		

### Threaded studs

Threaded studs	Item no.	Thread size	Thread length (mm)	Shank length (mm)	Shank diameter (mm)	Base material
X-M6-7-14 B3 P7	2105408	M6	7	14	3	Steel
X-M6-7-24 B3 P7	2105409	M6	7	24	3	Concrete
X-W6-12-14 B3 P7	2105800	W6	12	14	3	Steel
X-W6-12-20 B3 P7	2105801	W6	12	20	3	Concrete

### Fastener selection



	Nail Selector for BX 3-ME (02) and BX 3-IF 			
	Brick	Concrete Floor	Concrete Wall/Ceiling	Steel
	<b>X-C 24 B3 MX</b>	<b>X-C 20 B3 MX</b> X-C 24 B3 MX	<b>X-C 20 B3 MX</b> X-P 17 B3 MX	<b>X-S 14 B3 MX</b>
	-----	<b>X-C 36 B3 P7</b>	-----	-----
	<b>X-C 24 B3 MX</b> X-C 20 B3 MX		<b>X-P 20 B3 MX</b>	<b>X-S 14 B3 MX</b>
	<b>X-P 20 B3 MX</b> X-P 17 B3 MX	-----	<b>X-P 17 B3 MX</b>	<b>X-S 14 B3 MX</b>
	-----	<b>X-C 24 B3 MX</b> X-C 20 B3 MX	-----	<b>X-S 14 B3 MX</b>
	<b>X-W6-12-20 B3 P7</b> <b>X-M6-7-24 B3 P7</b>			<b>X-W6-12-14 B3 P7</b> <b>X-M6-7-14 B3 P7</b>
<b>Propellant-free</b>				

For more details and information, please contact your nearest Hilti representative.

## Fastener selection

	Nail Selector for BX 3 02 and BX 3-L 02			
	Brick	Concrete Floor	Concrete Wall/Ceiling	
	X-C 24-36 B3 MX*	X-C 20 B3 MX X-C 24 B3 MX	X-C 20 B3 MX X-P 17 B3 MX	X-S 14 B3 MX
	-----	X-C 36 B3 MX*	-----	-----
	X-C 24 B3 MX X-C 20 B3 MX		X-P 20 B3 MX	X-S 14 B3 MX
	X-P 20 B3 MX X-P 17 B3 MX	-----	X-P 17 B3 MX	X-S 14 B3 MX
	-----	X-C 24 B3 MX X-C 20 B3 MX	-----	X-S 14 B3 MX
Propellant-free				

\* X-C 36 B3 MX suitable for BX 3-L 02 only

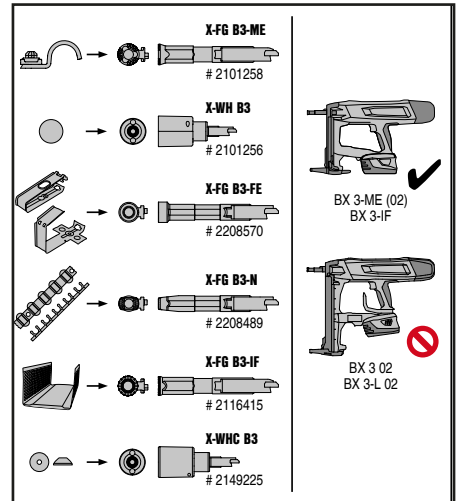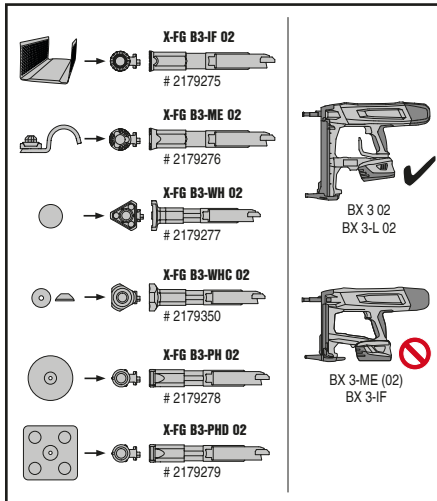





## Fastening quality assurance

### Fastening inspection

#### Nails and studs in concrete / sand-lime masonry




X-C\_B3, X-P\_B3:  
 $h_{NVS} = 2-5 \text{ mm}$




X-M6-7-24 B3 P7  
X-W6-12-20 B3 P7

$h_{NVS} \geq 7 \text{ mm}$   
 $\geq 12 \text{ mm}$




X-C\_B3, X-P\_B3:  
 $h_{NVS} = 2-3 \text{ mm}$




Deflection head  
X-P 36 B3 P7, X-C 36 B3 MX  
12.5 mm board:  $h_{NVS} \leq 12 \text{ mm}$   
15 mm board:  $h_{NVS} \leq 9 \text{ mm}$   
19 mm board:  $h_{NVS} \leq 5 \text{ mm}$

#### Nails and studs in steel



X-S\_B3:  
 $h_{NVS} = 2-9 \text{ mm}$




X-M6-7-14 B3 P7  
X-W6-12-14 B3 P7

$h_{NVS} \geq 7 \text{ mm}$   
 $\geq 12 \text{ mm}$

Element	$h_{NVS}$ (mm)	
	Concrete	Steel
X-EKB 4/8 MX	6-11	6-9
X-EKB 16 MX	6-11	6-9
X-ECT MX	6-11	6-9
X-UCT MX	6-11	6-9
X-ECH MX	6-11	6-9
X-EKS MX	6-11	6-9
X-EKSC MX	6-11	6-9
X-FB MX	7-11	7-9
X-DFB MX	7-11	7-9
X-ECC MX	7-11	7-9
X-EHS MX	7-11	7-9
X-ET MX*	5-10	5-9





#### Examples

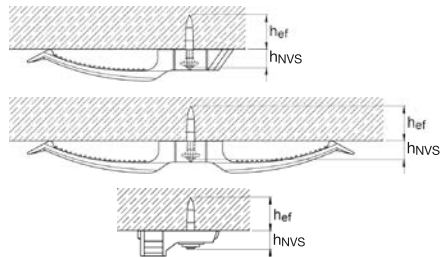

\*) With X-ET MX, the  $h_{NVS}$  is measured against the cable trunk.



Hilti Corrosion handbook /DFTM



Attn. : To whom it may concern

Date : 27 September 2023  
Ref. : 149/DF/DY/23

Subject : Country of Origin- Hilti X-P B3 P7 Concrete Nails

Dear Sir / Madam,

Enclosed please find the information of X-P B3 P7 Concrete Nails.

Brand Name : Hilti

Model Name : Hilti X-P B3 P7 Concrete Nails

Manufacturer : Hilti Corporation

Address of Manufacturer : FL-9494, Principality of Liechtenstein.

Manufacturer Contact Person : Dennis Yeung

Supplier : Hilti (Hong Kong) Ltd

Address of Supplier : 701-704, 7/F, Tower A, Manulife Financial Centre,  
223 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Supplier Contact Person : Dennis Yeung (+852 9723 4621)

Country of Origin : Liechtenstein

Should you have further questions, please do not hesitate to contact our Technical Representatives, Customer Service Hotline at 8228-8118, or email us at [hksales@hilti.com](mailto:hksales@hilti.com).

Yours faithfully,



Dennis Yeung  
Head of Product Leadership Strategy, F&P

Attn. : To whom it may concern

Date : 26 September 2023  
Ref. : 136/DF/DY/23

Subject : Country of Origin- Hilti BX 3 Battery-Actuated Fastening Tool

Dear Sir / Madam,

Enclosed please find the information of Hilti BX 3 Battery-Actuated Fastening Tool.

Brand Name : Hilti

Model Name : Hilti BX 3 Battery-Actuated Fastening Tool

Manufacturer : Hilti Corporation

Address of Manufacturer : FL-9494, Principality of Liechtenstein.

Manufacturer Contact Person : Dennis Yeung

Supplier : Hilti (Hong Kong) Ltd

Address of Supplier : 701-704, 7/F, Tower A, Manulife Financial Centre,  
223 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Supplier Contact Person : Dennis Yeung (+852 9723 4621)

Country of Origin : Austria

Should you have further questions, please do not hesitate to contact our Technical Representatives, Customer Service Hotline at 8228-8118, or email us at [hksales@hilti.com](mailto:hksales@hilti.com).

Yours faithfully,



Dennis Yeung  
Head of Product Leadership Strategy, F&P

