
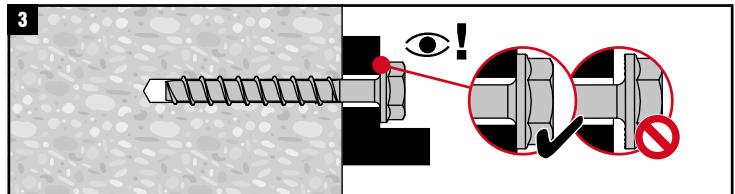
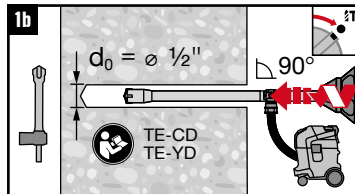


KH-EZ CRC 1/2"	h_1^*	$h_{nom1} = 2.25"$ $t_{fix1 \text{ max}}$	$h_{nom2} = 3.0"$ $t_{fix2 \text{ max}}$	$h_{nom3} = 4.25"$ $t_{fix3 \text{ max}}$	$h_{nom4} = 5.5"$ $t_{fix4 \text{ max}}$
1/2" x 3"	3 3/8" - t_{fix}	3/4"	-	-	-
1/2" x 4"	4 3/8" - t_{fix}	1 3/4"	1"	-	-
1/2" x 5"	5 3/8" - t_{fix}	2 3/4"	2"	3/4"	-
1/2" x 6"	6 3/8" - t_{fix}	3 3/4"	3"	1 3/4"	1/2"

		2.2			
		$h_{nom} \leq 3"$	$h_{nom} > 3"$	$h_{nom} \leq 3"$	$h_{nom} > 3"$
	Nuron SID 4-22	✓	✓	✗	✗
	Nuron SID 6-22	✓	✓	✗	✗
	Nuron SIW 4-22	✓	✓	✓	✓
	Nuron SIW 6-22	✗	✓	✗	✗
	CPC SIW 6AT-A22/A18	✓	✗	✓	✗
	CPC SIW 22T/18T-A	✗	✓	✗	✓
		45 ft-lb	45 ft-lb	25 ft-lb	25 ft-lb

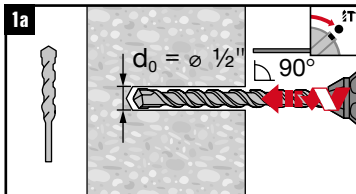

*For non-hole cleaning installation (step 1a), make sure to drill deep enough to achieve h_1 , taking into account the depth of debris remaining in the hole.